CDLC0602

USED WITH:

9212_ SERIES POP/TEAR TESTERS, FULL OPENING


CHANGE PARTS

9752

9753

9754

9755

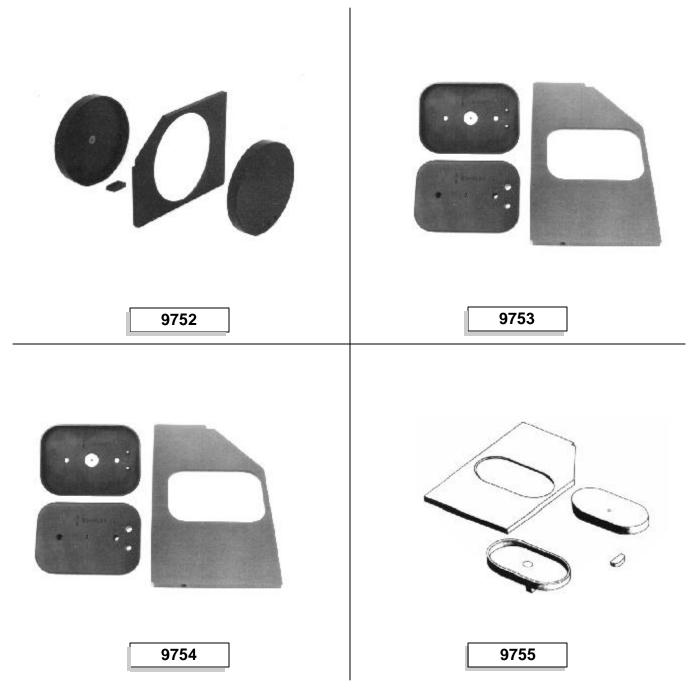

LATEST VERSION(S) MAY VARY SLIGHTLY FROM PHOTO(S)

PRODUCT OVERVIEW

These Change Parts are used with 9212 series pop/tear testers to hold a sample in place as it's full-opening end is pulled away, or as the tab is tested. The Change Parts are manufactured by Altek to specific customer requirements.

9752 DESCRIPTION

The 9752 Change Parts hold a round end or can in place as the full-opening end or tab is being tested. The 9752 consists of an adapter plate which slides into the tester; a cup which holds an unseamed end in the adapter plate; a plug which is used when a can (seamed end) is being tested; and an anvil, which supports the back of the tab during tab testing.

9753 DESCRIPTION

The 9753 Change Parts hold a single-radius rectangular end or can in place as the full-opening end or tab is being tested. The 9753 consists of an adapter plate which slides into the tester; a cup which holds an unseamed end in the adapter plate; a plug which is used when a can (seamed end) is being tested; and an anvil, which supports the back of the tab during tab testing.

9754 DESCRIPTION

The 9754 Change Parts hold a multipleradius rectangular end or can in place as the full-opening end or tab is being tested. The 9754 consists of an adapter plate which slides into the tester; a cup which holds an unseamed end in the adapter plate; a plug which is used when a can (seamed end) is being tested; and an anvil, which supports the back of the tab during tab testing.

9755 DESCRIPTION

The 9755 Change Parts hold an oval end or can in place as the full-opening end or tab is being tested. The 9755 consists of an adapter plate which slides into the tester; a cup which holds an unseamed end in the adapter plate; a plug which is used when a can (seamed end) is being tested; and an anvil, which supports the back of the tab during tab testing.

SPECIFICATIONS

The following document describes the specifications for these Change Parts:

CDXC0601 - Change Parts Specifications

9752 ORDERING

The 9752 is ordered by specifying 9752 on the appropriate Customer Order Guide and supplying detail drawings and several samples to Altek. Drawings and can samples MUST be provided to ensure proper manufacture of the 9752 Change Parts.

9753 ORDERING

The 9753 is ordered by specifying 9753 on the appropriate Customer Order Guide and supplying detail drawings and several samples to Altek. Drawings and can samples MUST be provided to ensure proper manufacture of the 9753 Change Parts.

9754 ORDERING

The 9754 is ordered by specifying 9754 on the appropriate Customer Order Guide and supplying detail drawings and several samples to Altek. Drawings and can samples MUST be provided to ensure proper manufacture of the 9754 Change Parts.

9755 ORDERING

The 9755 is ordered by specifying 9755 on the appropriate Customer Order Guide and supplying detail drawings and several samples to Altek. Drawings and can samples MUST be provided to ensure proper manufacture of the 9755 Change Parts.

TECHNICAL SUPPORT

Altek provides comprehensive technical support to its customers worldwide. For assistance, contact Altek and ask for the Engineering department.

REPAIR

Altek customers can obtain a return authorization from Altek and ship a faulty unit in for repair, if necessary. In addition, replacement parts for all models are available from Altek.

WARRANTY

All Altek products are built to the highest standards of quality and reliability. This Altek product is backed by a full 90-day warranty.

FURTHER INFORMATION

See the accompanying specifications for additional information concerning this product. If specifications were not included with this flier, please call Altek; they will be mailed or faxed as quickly as possible

CUSTOM DESIGN.

Altek can custom design inspection and test equipment to meet specific customer requirements. Custom Change Parts can also be designed and manufactured for most Altek products; contact Altek for further information.

A NOTE ON SAMPLES

Samples sent to Altek as a requirement for the manufacture of Change Parts must be submitted in their "as tested" form. For instance, if an end will be tested unseamed on a piece of test equipment, Altek must receive ends that are unseamed in order to properly manufacture the Change Parts. Contact Altek for further information regarding sample requirements for Change Parts manufacture.

For more information, contact Altek between 8:00 am and 5:00 pm ET, Monday thru Friday. The Altek company address and phone numbers can be found on the front of this flier.

ORDERING INFORMATION To purchase this product:

This flier is supplemented by additional literature in the form of a specification sheet.

At least one of these Change Parts sets is required for operation of an Altek pop/tear tester.

Customer detail drawings and samples are REQUIRED in order to ensure proper manufacture and operation of the Change Parts.

These Change Parts are ordered by specifying the required information (as described above) on the appropriate Customer Order Guide.

\vC06 SPECIFICATIONS

\yC06 SPECIFICATIONS		
ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE		
CHANGE PARTS: 9752, 9753, 9754, 9755		
USED WITH MODELS: 9212B, 9212BE2, 9212BER2		
EFFECTIVE DATE: FEB 14, 1994		
SAMPLE TYPE: FULL OPENING FOOD/UTILITY ENDS & CANS		
NOTE: A SEPARATE SET OF CHANGE PARTS MUST BE MANUFACTURED FOR EACH SPECIFIC DIAMETER OR CROSS-SECTION OF SAMPLE.		
9752:	For round, seamed or unseamed metal food/utility ends	
	End Diameter	200 - 800 (2" to 8")
	Can Body Diameter	200 - 800
	Can Height, Seamed End .	(2" to 8") 1000 max
		(10")
9753:	For single-radius rectangular seamed or unseamed metal food/utility ends	
	End L x W	800 dia max envelope (8")
	Can Height, Seamed End .	1000 max (10")
9754:	For multiple-radius rectangular seamed or unseamed metal food/utility ends	
	End L x W	800 dia max envelope (8")
	Can Height, Seamed End .	1000 max (10")
9755:	For oval, seamed or unseamed metal food/utility ends	
	End L x W	800 dia max envelope (8")
	Can Height, Seamed End .	

(10")